





**AUSSIE**  
GREEN LIGHTING

Unit 10/78 Willandra Drive Epping Vic 3076 | 03 9401 4885|

E-mail:[info@aussiegreenlighting.com.au](mailto:info@aussiegreenlighting.com.au) |

Web:[www.aussiegreenlighting.com.au](http://www.aussiegreenlighting.com.au)

# LED Shoe Box Light

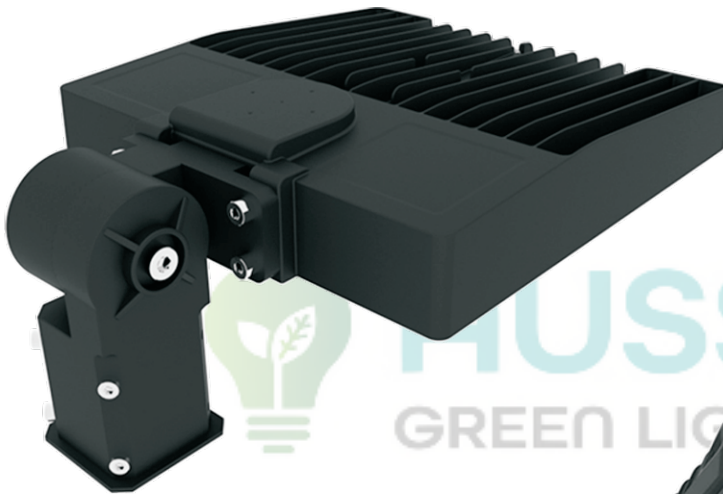

- Die-cast Aluminum Housing with Corrosion Resistant Powder Coat
- 4 Types of Mounting Brackets
- High Performance SMD3030 Chips
- L70>50,000 hours
- Easy to instal with single worker
- High Efficiency PC Lens
- Type3, Type4, Type5 Distribution
- Surge Protection 10KVA
- High Quality Drivers

## APPLICATION

1. Street Lighting, Road Lighting, Roadway Lighting
2. Outdoor Area Lighting, High Mast Lighting
3. Parking Lot Lighting, solar Lighting



# SPECIFICATIONS

Power	60W	75W	100W	150W
Efficiency	130lm/w			
Lumen	7800lm	10500lm	14000lm	21000lm
Power Driver	Sosen SS-75VP-56BH	Sosen SS-75VP-56BH	Sosen SS-100VP-56BH	Sosen SS-150VP-56BH
	Meanwell HLG-80H-48A	Meanwell HLG-80H-48A	Meanwell HLG-100H-48A	Meanwell HLG-150H-48A
LEDS Brand	Lumileds 3030			
Input Voltage	AC220~240V,50Hz			
CCT	3000-6500K			
IP Rating	IP 65			
Beam Angle	TYPE3,TYPE4,TYPE5			
Power Factor	>0.95			
CRI	Ra > 80			
Material	AL			
Warranty	5 Years			



Power	200W	240W	300W	320W
Efficiency	130lm/w			
Lumen	28000lm	33600lm	42000lm	44800lm
Power Driver	Sosen SS-200VP-56BH	Sosen SS-240VP-56BH	Sosen SS-320VP-56BH	Sosen SS-320VP-56BH
	Meanwell HLG-240H-48A	Meanwell HLG-240H-48A	Meanwell HLG-320H-48A	Meanwell HLG-320H-48A
LEDS Brand	Lumileds 3030			
Input Voltage	AC220~240V,50Hz			
CCT	3000-6500K			
IP Rating	IP 65			
Beam Angle	TYPE3,TYPE4,TYPE5			
Power Factor	>0.95			
CRI	Ra > 80			
Material	AL			
Warranty	5 Years			




## PACKING



Model	SB60/75W-A1	SB100/150W-A1	SB200W-A1	B240/300/320W-A1
Product Size (mm)	357X290X73	536X322X80	560X322X75	540X346X103
CTN Size (mm)	530X380X160	590X380X160	672X390X195	750X400X180
N.W.(KG)	4.5	6.2	6.3	7.5
G.W. (KG)	5.1	7	6.05	8.6
QTY/CTN	1	1	1	1




## BRACKET



# DISTRIBUTION OPTIONAL

TYPE 3

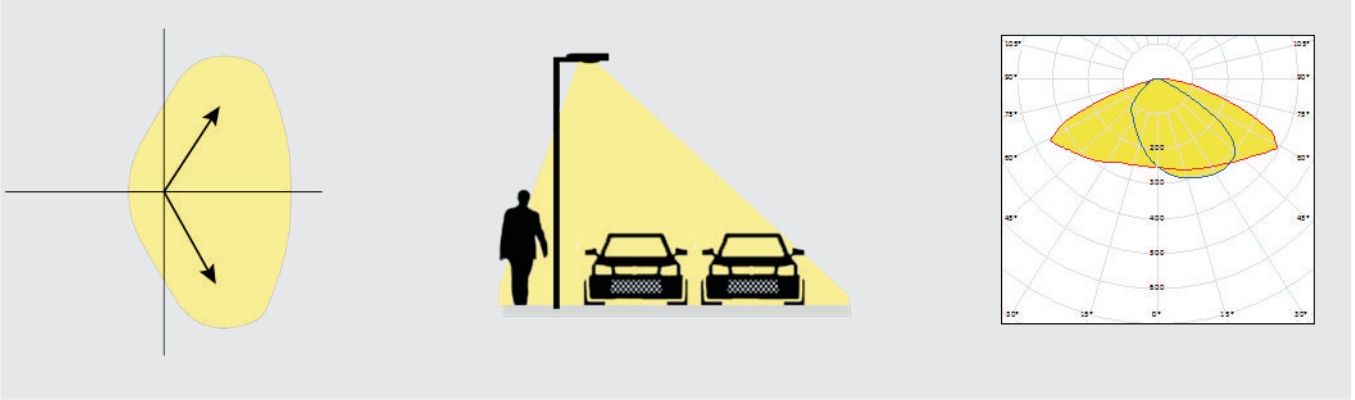

TYPE 4



TYPE 5

