



Unit 10/78 Willandra Drive Epping Vic 3076 | 03 9401 4885|

E-mail: info@aussiegreenlighting.com.au

Web:www.aussiegreenlighting.com.au

LED Batten Light with Sensor | 16W







Motion+daylight sensor Detection area: 3-5.5metres Hold on time: 10s/1min/5min/30min With remote control

APPLICATION

Indoor lighting, with IP42, it can be used at supper market, family

mart, corridor, parking lots, factory, warehouse, school, hospital, public building, metro station, train station, airport terminal and etc




SPECIFICATIONS

Product Size (mm)	1170X90X67		
Power	16W		
Input Voltage	AC220~240V,50Hz		
Efficiency	150lm/w		
Sensor	Daylight&Microwave Motion Sensor, Sensing distance 4–6m		
Dimmable	PWM		
LED Type	SMD 2835		
CCT	2700-6500K		
CRI	Ra > 80		
Power Factor	> 0.9		
Beam Angle	120°		
IP Rating	IP 42		
Warranty	3 years		
Working Temp	–20~50℃		
Lamp Body Material	PC+SPCC		

LED MANUAL INSTRUCTION



- 1 Installation should be done by registered electricians.
- 2 Before replacing the driver, please switch off the power supply and wait until it cools down completely.
- 3 Never touch the working luminaire
- 4 In any case of malfunction, switch off the power supply immediately, and do not try to repair it yourself.
- **6** Repairment should only be done by registered electricians or official service agent.





Model	E1(mm)	E2(mm)
ERS-B12/20W60S	626	650
ERS-B16/18/24/36/40W120S	1060	1124
ERS-B48/50/54W150S	1270	1380







Switch off the power supply before installation

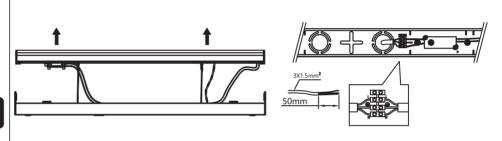

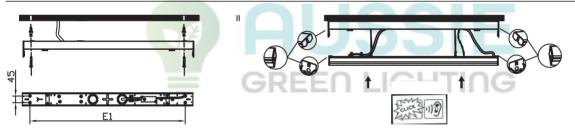


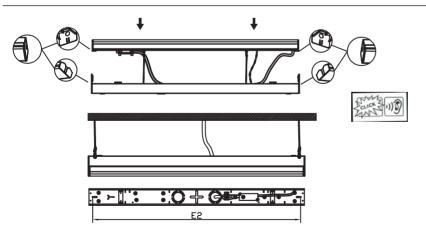




Switch off the power supply before installation

DETAILS

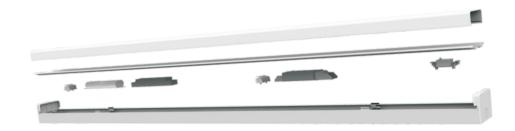



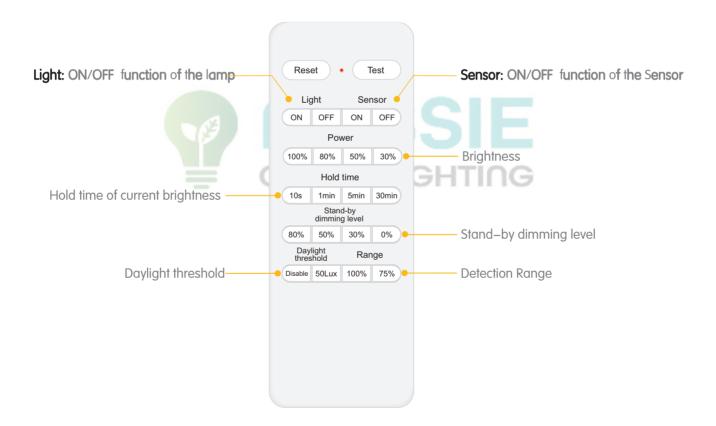

PACKING

N.W.(KG)	G.W.(KG)	CARTON SIZE(mm)	QTN/CTN
10.5	12.1	1190X310X160	6