



**AUSSIE**  
GREEN LIGHTING

Unit 10/78 Willandra Drive Epping Vic 3076 | 03 9401 4885 |


E-mail: [info@aussiegreenlighting.com.au](mailto:info@aussiegreenlighting.com.au) |

Web: [www.aussiegreenlighting.com.au](http://www.aussiegreenlighting.com.au)

# LED HIGH BAY | 75W

## SPECIFICATIONS

Power	75W
Lumen	12000lm
CCT	3000-6500K
Input Voltage	AC220~240V,50Hz
IP Rating	IP65
Beam Angle	120°
CRI	Ra>80
LED Chips	SMD 2835
Sensor	Daylight & Microwave Motion Sensor
Dimmable	PWM
Cable	1.2 Metres+AU plug
Accessoris	Trinity Installed Chain & Remote
Product Size (mm)	D230X122
VEU	Approved
IPART	Approved



## REMOTE CONTROLLER

Factory setting: When turn on the High Bay light, sensor function is closed;  
 if you need to open the sensor, please use our remote controller as below.  
 Sensor default setting: daylight (OFF), motion(2 seconds), hold time (2 seconds),  
 standby brightness 0%.

**D:** Press one time, Daylight Sensor working only.

**On:** Press one time, work with default setting.

**Sc1:** Hold on 30 minutes and then dimming down to its 50% luminosity. Daylight Sensor OFF.


**Sc2:** Hold on 10 minutes and then dimming down to its 20% luminosity. Daylight Sensor OFF.

**M:** Press one time, Motion Sensor working only.

Record the current environment lux.

**Sc3:** Hold on 30 seconds and then turn OFF. Daylight Sensor OFF.

## FUNCTION DEMO-ON/OFF CONTROL

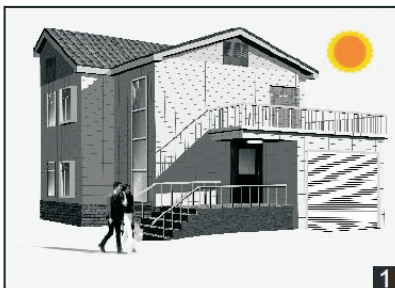

With insufficient daylight,even when motion detected.light remains OFF.



With insufficient daylight,even when motion detected.light ON.



After the last detection and the present hold time elapsed.light OFF.


# SENSOR SPECIFICATION

## Detection Patterns

### Technical data

Operating voltage	12VDC $\pm$ 2v
Stand-by power	< 1W
Operating temperature	-20°C ~ +60°C
Detection area	100%/75%/50%/20%
Hold time	2Sec/30Sec/60Sec/2Min/5Min/15Min/30Min/60Min
Daylight threshold	5Lux/25Lux/50Lux/100Lux/300Lux/600Lux/Disable
Microwave power	< 1mW
Microwave frequency	5.8GHz $\pm$ 75MHz
Mounting height	Max.12m(ceiling mounted)
Detection range	Diameter 14m (ceiling mounted)
Type	Built-in

Note: Sensor setting please refer to remote control

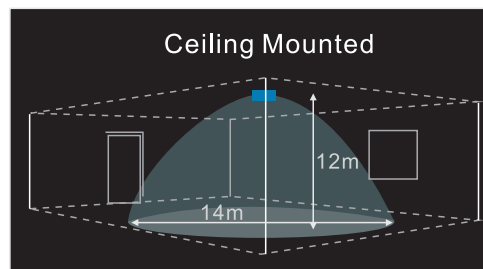

## PACKING

N.W.(KG)	G.W.(KG)	CARTON SIZE(mm)	QTN/CTN
1.6	1.9	260X260X150	1