



AUSSIE
GREEN LIGHTING

Unit 10/78 Willandra Drive Epping Vic 3076 | 03 9401 4885|


E-mail: info@aussiegreenlighting.com.au |

Web: www.aussiegreenlighting.com.au

LED HIGH BAY | 120W


SPECIFICATIONS

Power	120W
Lumen	19200lm
CCT	3000–6500K
Input Voltage	AC220~240V,50Hz
IP Rating	IP65
Beam Angle	120°
CRI	Ra>80
LED Chips	SMD 2835
Sensor	Daylight & Microwave Motion Sensor
Dimmable	PWM
Cable	1.2 Metres+AU plug
Accessories	Trinity Installed Chain & Remote
Product Size (mm)	270*183
VEET	Pending
IPART	Pending



REMOTE CONTROLLER

Factory setting: When turn on the High Bay light, sensor function is closed;
if you need to open the sensor, please use our remote controller as below.
Sensor default setting: daylight (OFF), motion(2 seconds), hold time (2 seconds),
standby brightness 0%.

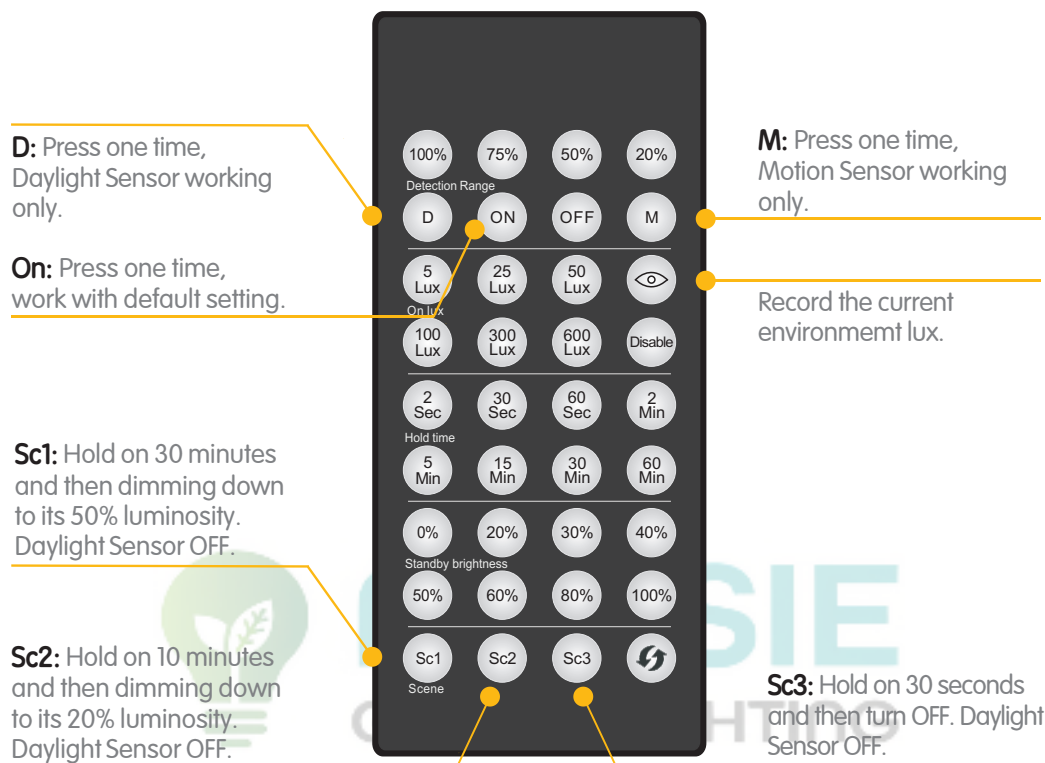

FUNCTION DEMO-ON/OFF CONTROL



when motion is detected.



no motion is detected.


SENSOR SPECIFICATION

Detection Patterns

Technical data

Operating voltage	12VDC $\pm$ 2v
Stand-by power	< 1W
Operating temperature	-20°C ~ +60°C
Detection area	100%/75%/50%/20%
Hold time	2Sec/30Sec/60Sec/2Min/5Min/15Min/30Min/60Min
Daylight threshold	5Lux/25Lux/50Lux/100Lux/300Lux/600Lux/Disable
Microwave power	< 1mW
Microwave frequency	5.8GHz $\pm$ 75MHz
Mounting height	Max.12m(ceiling mounted)
Detection range	Diameter 14m (ceiling mounted)
Type	Built-in

Note: Sensor setting please refer to remote control

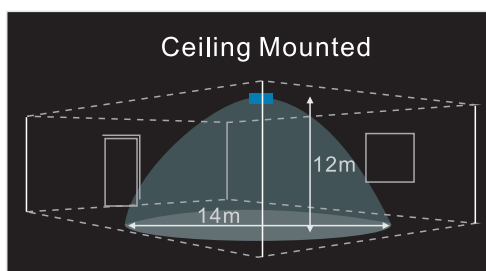

PACKING

N.W. (KG)	LAMP SIZE (MM)	CARTON SIZE(MM)	QTY/CTN
2.1	ø 270*183	740*274*315	4