





AUSSIE
GREEN LIGHTING

Unit 10/78 Willandra Drive Epping Vic 3076 | 03 9401 4885 |



E-mail: info@aussiegreenlighting.com.au |

Web: www.aussiegreenlighting.com.au

LED Canopy Light B | 1 20W

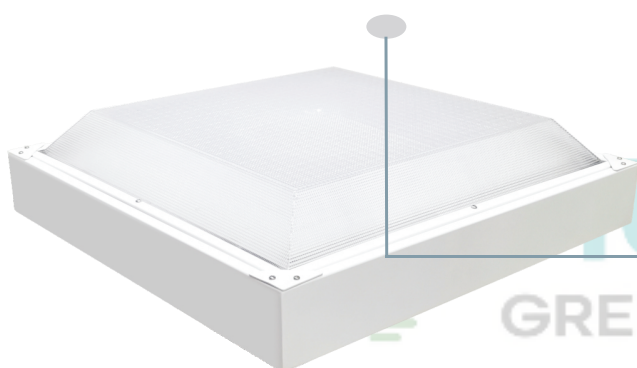

Built-in sensor

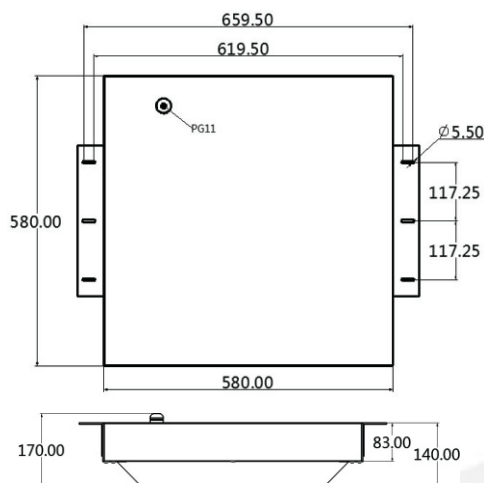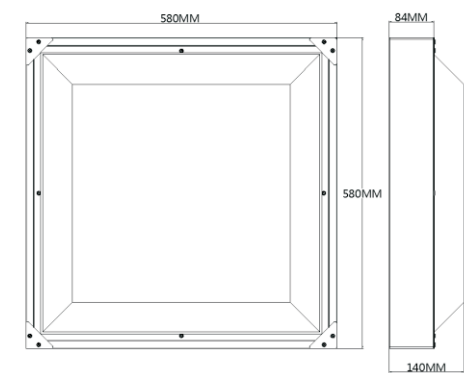

APPLICATION

Suitable for food processing and parking areas,Service station canopies, Car park, Retail areas, Shopping malls and Manufacturing facilities.




SPECIFICATIONS


Product Size (mm)	580X580X180
Input Voltage	AC220~240V,50Hz
Power	120W
LED Type	Lumileds 3030
Input Driver	Sosen / Meanwell
Lumen(± 10%)	9750lm
CCT	2700–6500K
Sensor	Daylight & Microwave Motion Sensor
Beam Angle	120°
CRI	Ra>80
Power Supply Efficiency	>95%
LED Lumious Efficiency	130lm/w
Power Factor (PF)	> 0.95
Total Harmonic Distortion (THD)	≤15%
IP Rating	IP 65
Certificate	C–TICK,SAA,CE,CB
Material	PC+AL
Accessories	2PCS Installation Brackets

REMOTE CONTROLLER

Factory setting: When turn on the Canopy light, sensor function is closed;
if you need to open the sensor, please use our remote controller as below.
Sensor default setting: daylight (OFF), motion(2 seconds), hold time (2 seconds),
standby brightness 0%.

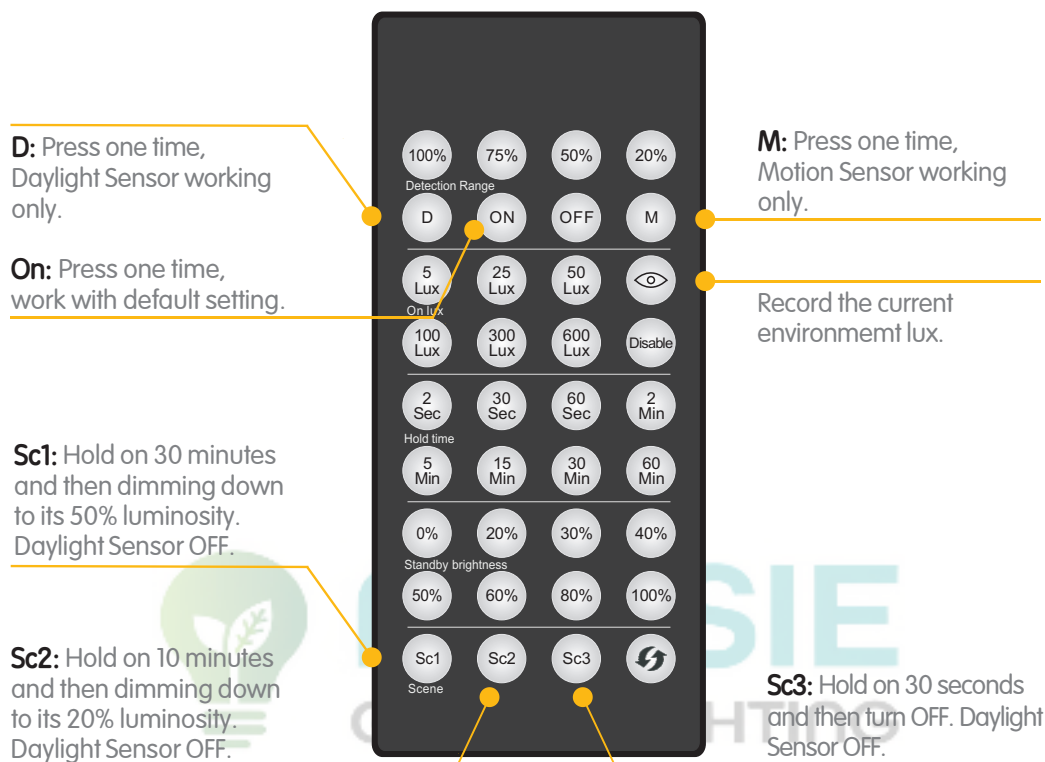

FUNCTION DEMO-ON/OFF CONTROL

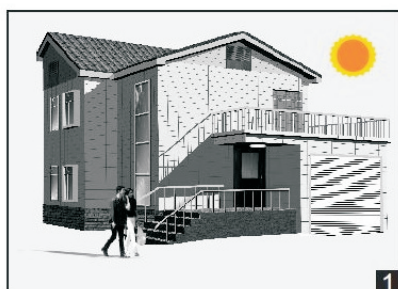

With insufficient daylight,even when motion detected,light remains OFF.



With insufficient daylight,even when motion detected,light ON.



After the last detection and the present hold time elapsed,light OFF.


SENSOR SPECIFICATION

Detection Patterns

Technical data


Operating voltage	12VDC ± 2v
Stand-by power	< 1W
Operating temperature	-20℃ ~ +60℃
Detection area	100%/75%/50%/20%
Hold time	2Sec/30Sec/60Sec/2Min/5Min/15Min/30Min/60Min
Daylight threshold	5Lux/25Lux/50Lux/100Lux/300Lux/600Lux/Disable
Microwave power	< 1mW
Microwave frequency	5.8GHz ± 75MHz
Mounting height	Max.12m(ceiling mounted)
Detection range	Diameter 14m (ceiling mounted)
Type	Built-in

Note: Sensor setting please refer to remote control

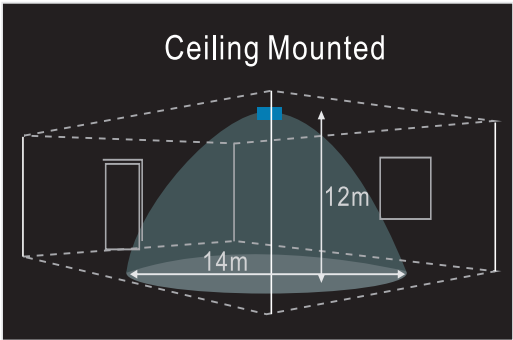


RECESSED INSTALLATION


1. Fix the bracket kit to the lamp with M5*12 screws.

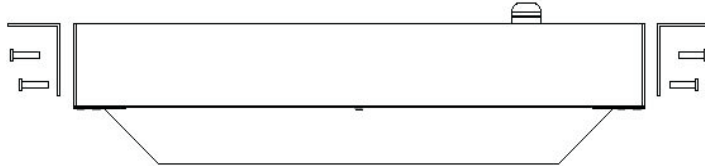

2. Place the lamp into the right place of ceiling like below.

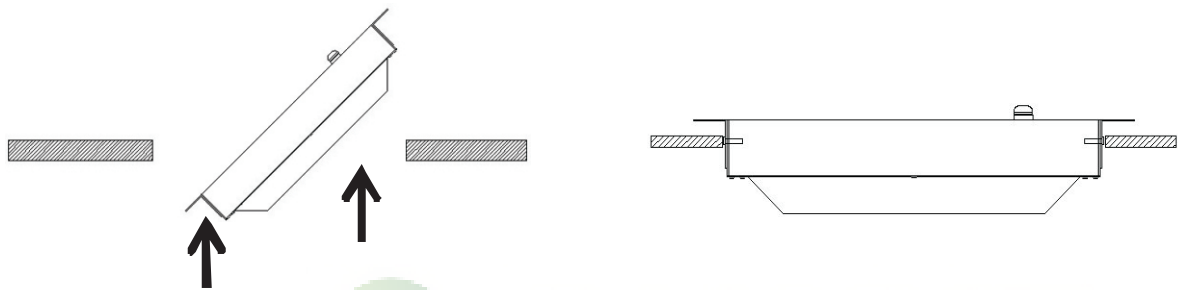

3. The effect is shown like below; then off the power, connect the wires, switch on the power.

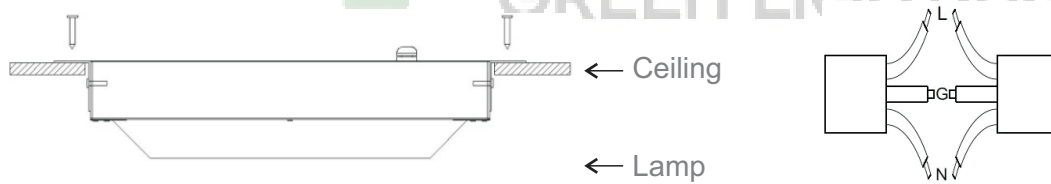


INSTALLATION INSTRUCTION


Surface Mounted Installation

Accessories Package: 2pcs installation brackets (size 300*52.5*72.5MM, thickness 2.5mm); 6pcs M5*12 screws.



1. Fix the bracket kit to the lamp with M5*12 screws.

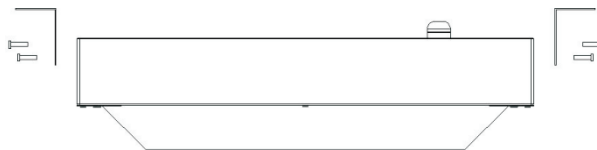

2. Fix the lamp to ceiling with M5*12 screws.

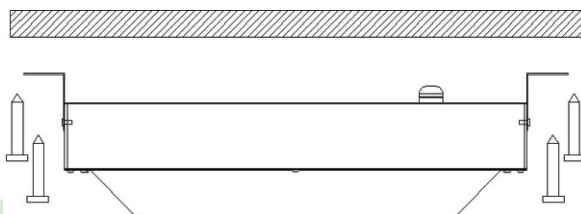

3. The effect is shown like below; then off the power, connect the wires, switch on the power.

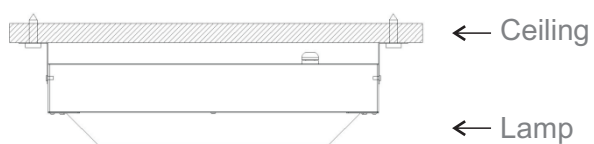

PACKING

Item code	ERS-C75W-B
Carton Size (mm)	695X690X210
Qty/CTN	1
N.W (KG)	10
G.W (KG)	12

