






SUPREME LED HIGH BAY | SP

SPECIFICATIONS



Power	50W	60W	75W
Lumen	11000lm	13200lm	16500lm
Input Voltage	AC220~240V,50Hz		
CCT	3000K,4000K,5000K		
IP Rating	IP 65		
Beam Angle	120°		
CRI	Ra > 80		
LED Chips	SMD 2835		
Sensor	Daylight & Microwave Motion Sensor		
Dimmable	PWM		
Cable	1.2 Metres+AU plug		
Accessories	Trinity Installed Chain & Remote		
Product Size (mm)	D258X147		



PACKING

N.W.(KG)	G.W.(KG)	CARTON SIZE(mm)	QTN/CTN
7.5	9	520X520X165	4

REMOTE CONTROLLER

Factory setting: When turn on the High Bay light, sensor function is closed; if you need to open the sensor, please use our remote controller as below.
 Sensor default setting: daylight (OFF), motion(2 seconds), hold time (2 seconds), standby brightness 0%.

D: Press one time, Daylight Sensor working only.

On: Press one time, work with default setting.

Sc1: Hold on 30 minutes and then dimming down to its 50% luminosity. Daylight Sensor OFF.

Sc2: Hold on 10 minutes and then dimming down to its 20% luminosity. Daylight Sensor OFF.

M: Press one time, Motion Sensor working only.

Record the current environment lux.

Sc3: Hold on 30 seconds and then turn OFF. Daylight Sensor OFF.


FUNCTION DEMO-ON/OFF CONTROL



With insufficient daylight,even when motion detected.light remains OFF.



With insufficient daylight,even when motion detected.light ON.

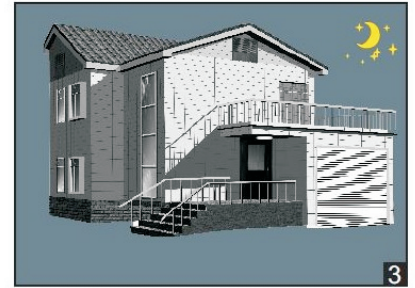

After the last detection and the present hold time elapsed.light OFF.

SENSOR SPECIFICATION

Detection Patterns

Technical data

Operating voltage	12VDC \pm 2v
Stand-by power	< 1W
Operating temperature	-20°C ~ +60°C
Detection area	100%/75%/50%/20%
Hold time	2Sec/30Sec/60Sec/2Min/5Min/15Min/30Min/60Min
Daylight threshold	5Lux/25Lux/50Lux/100Lux/300Lux/600Lux/Disable
Microwave power	< 1mW
Microwave frequency	5.8GHz \pm 75MHz
Mounting height	Max.12m(ceiling mounted)
Detection range	Diameter 14m (ceiling mounted)
Type	Built-in

Note: Sensor setting please refer to remote control

